


# STEP 25 Servo Tray (Heli-Radio)

## Helicopter Radio 6 Channel Setup

### STEP 25

From parts bag 5, assemble the servo tray using four 3x16mm Phillips Machine Screws. This is a good time to install the collective and throttle servos from the *inside* of the left vertical support. ( **Note, use the rubber grommets provided with the servos, you can use the screws that came with your servos or the screws provided in the kit** ). Attach the rudder, aileron and elevator servos noticing the orientation in to top servo tray. Attach the canopy mount using two 3x30 Phillips Machine Screws through the top of the servo tray, through the plastic spacer and into the canopy mount.

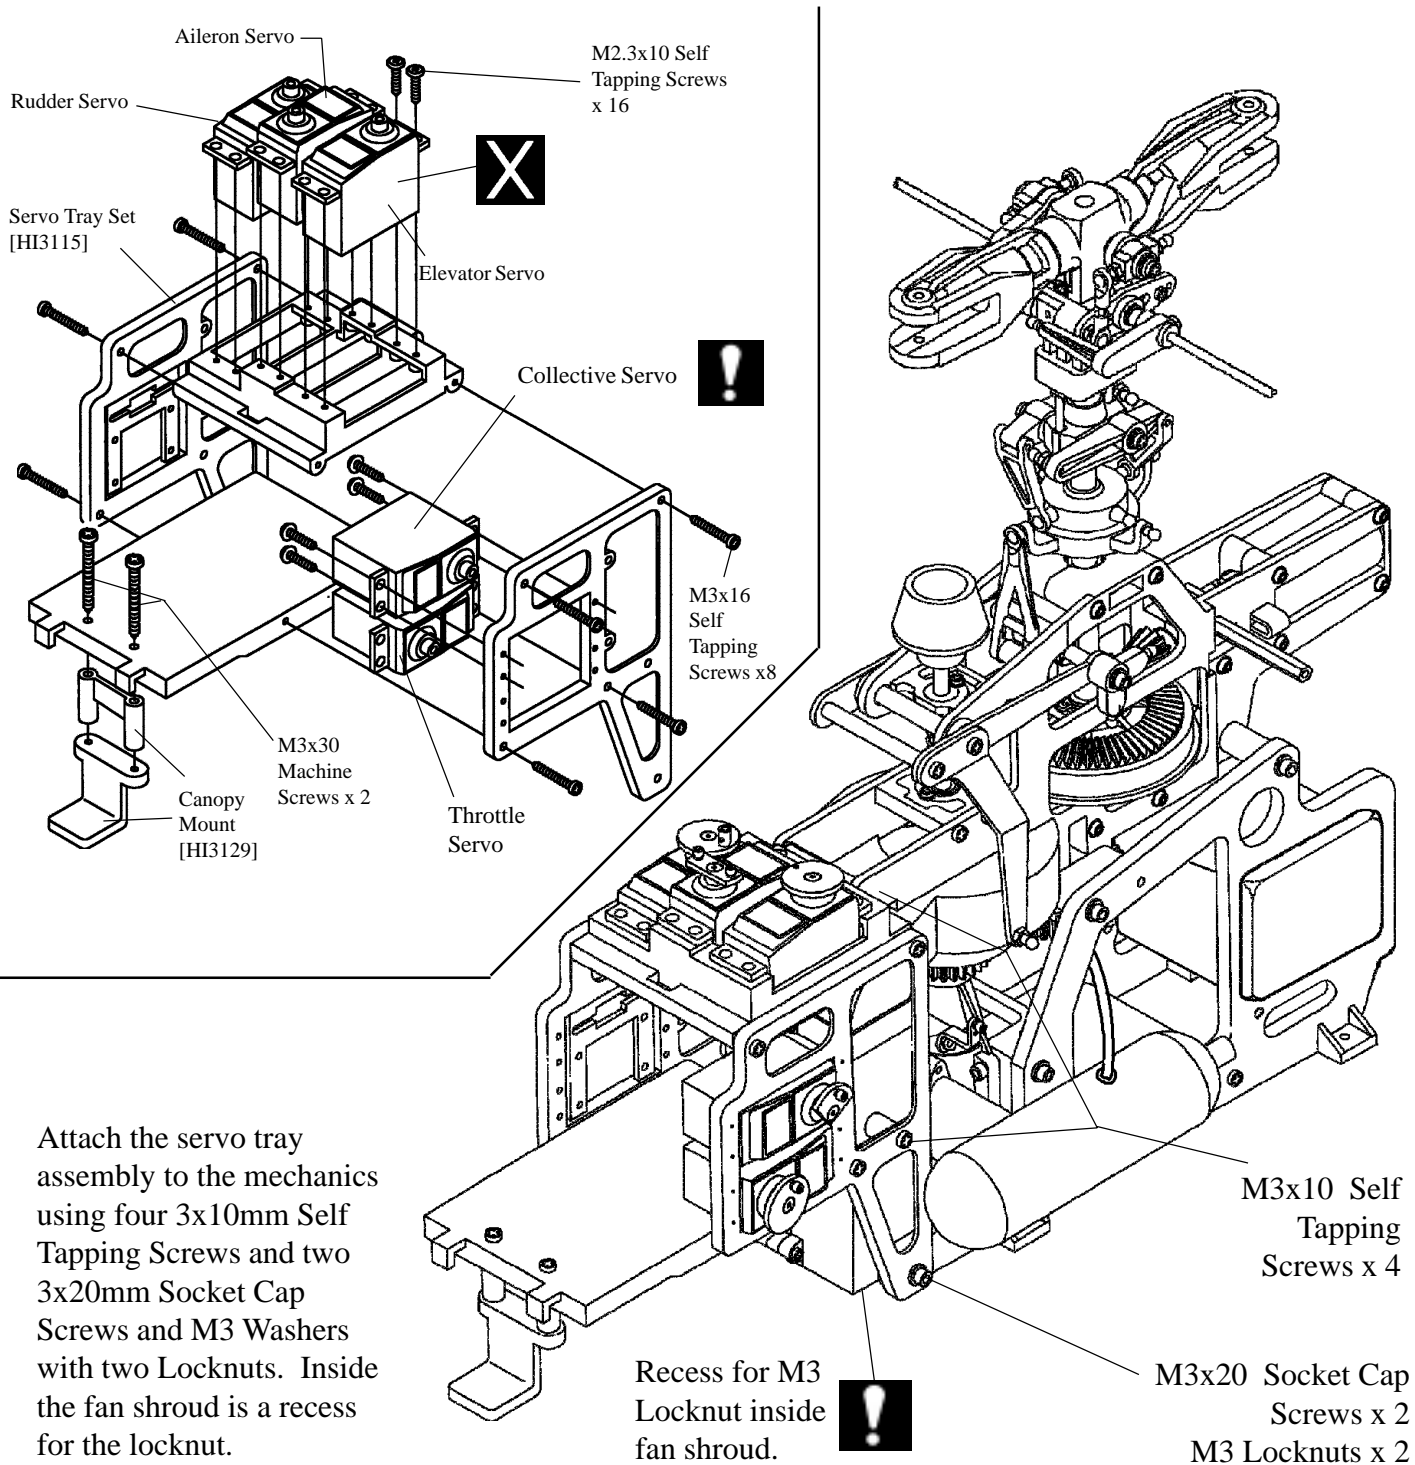

Attach the servo tray assembly to the mechanics using four 3x10mm Self Tapping Screws and two 3x20mm Socket Cap Screws and M3 Washers with two Locknuts. Inside the fan shroud is a recess for the locknut.